

The Power of music!

Crank up the volume, and create the perfect atmosphere for your business

Easy to control even at high volumes

SMS6.3 (B)



SMS6.3 (W)




SRP 449 Euro per piece
(excluding brackets)

EAN/JAN
SMS6.3(B) 4573488680027
SMS6.3(W) 4573488680034



Groovy sound to support sales

- Realizing a groovy sound that creates an uplifting atmosphere and stimulates all senses.
- The key to delivering flawless upbeat music is to deliver energy at all the levels.
- Newly developed OMF (Onkyo Micro Fiber) speaker drivers used.




Creating an immersive sound

- The horizontally aligned dual tweeter structure with tweeters on the back of the speaker diffuses the sound via the corners and walls of the commercial space.
- A natural blanket of sound even in monaural reproduction, reduction of differences in volume, and creates an atmosphere of being surrounded by sound.




Enjoy music without getting tired of it

- Based on psychoacoustics, it suppresses sound pressure in the most sensitive frequency ranges. Resulting in less stress for store employees who are exposed to music for a long time.
- Having a horizontally opposed dual tweeter structure, enables the mid-to-high range sound to be as clear as conversations with customers, even at high volumes.

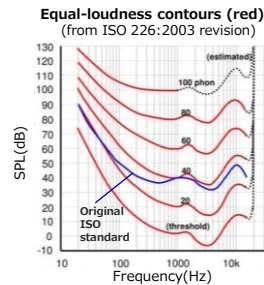


Design concepts that match your business

- Available in the popular black or white colour.
- Beautiful from all sides allowing freedom in installation.
- Available per piece, you can select an odd number according to the space size.
- Compatible with various commercially available ceiling mounts. It is also convenient for replacing speakers.

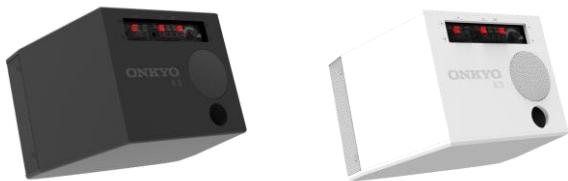

Easy to use, both at high and low impedance


- Uses a multi-tap transformer that can switch the output. (50W at 8Ω, 30/20/15/10 / 7.5W tap at 100V transmission)

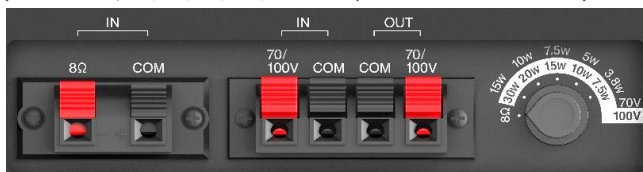

SMS6.3 Main specifications

Unit size	16cm woofer, 5cm tweeter x 2
Input power	100W (program), 50W (pink noise)
Impedance	8Ω, 70V/100V Compatible
Tap settings	100V Playback : 30, 20, 15, 10, 7.5W 70V Playback : 15, 10, 7.5, 5, 3.8W
SPL at 1W/1m	81dB / W / m
Frequency	40Hz - 20kHz (-10dB, semi-free space)
Input terminal	Push type (70V/100V is IN/OUT)
Screw size for brackets	M6 x 4 (100mm pitch, 60mm pitch)
Recommended brackets (Ceiling)	MMK Company : MSB-DS1 (optional)
Mounting flexibility	Vertical +18 ~ -45° (MSB-DS1 whilst in use)
Dimensions	W360 x H225 x D265mm (w/o protrusions)
Weight (pcs)	5.7kg
Colour	Black (SMS6.3B), White (SMS6.3W)
JAN/EAN	Black 4573488680027 White 4573488680034

Dimensional drawing

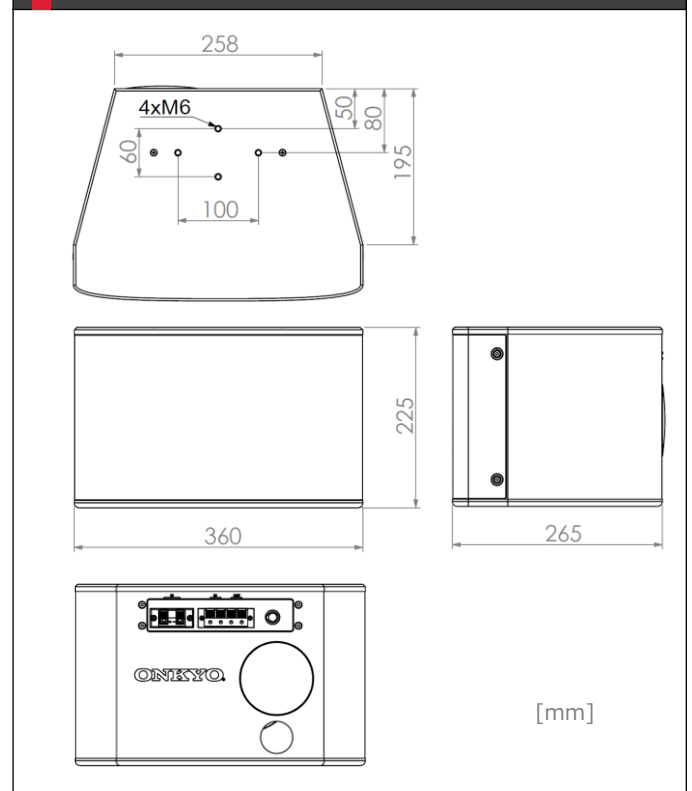

- "Onkyo", "ONKYO", and ONKYO logo are registered trademarks of Onkyo Corporation and are used under license.
- Other trademarks and trade names are the property of their respective owners.
- Other company names and product / technical names / service names mentioned are registered trademarks or trademarks of each company.
- Specifications, image drawings and appearance may change without notice.



<https://biz.ods.co.jp/page/intl>

ODS Corporation

Keio Kanda Suda-cho Bldg. 8F,
2-5 Kanda Suda-cho,
Chiyoda-ku, Tokyo 101-0041 Japan

Imported in the EU by;

Pioneer & Onkyo Europe GmbH
Gutenbergstrasse 3,
D-82178 Puchheim, Germany